
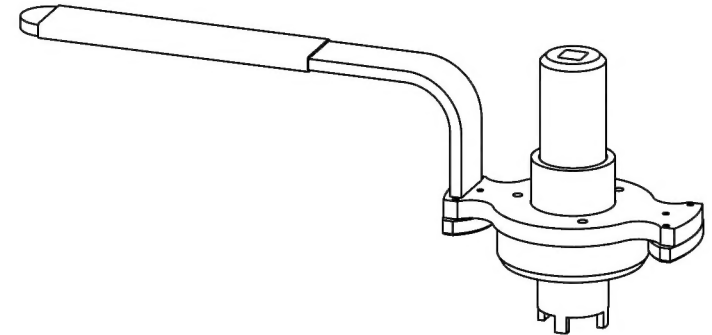


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	6/16/2016	DPD	JAG
2	16-0179	DELETED INK STAMP. -1 ADDED LASER ENGRAVE NOTE. ADDED DIM 6.7 NO ENGRAVE.-3, -7 CH'D MATERIAL WAS 1018/1020 CR IS 4140/4142; ADDED HEAT TREAT. -9 CH'D DIM WAS 4.40 IS 5.27; CH'D MAT'L WAS 4140/4142 Q&T IS 4140/4142; ADDED HEAT TREAT.	10/20/2016	SM	JAG

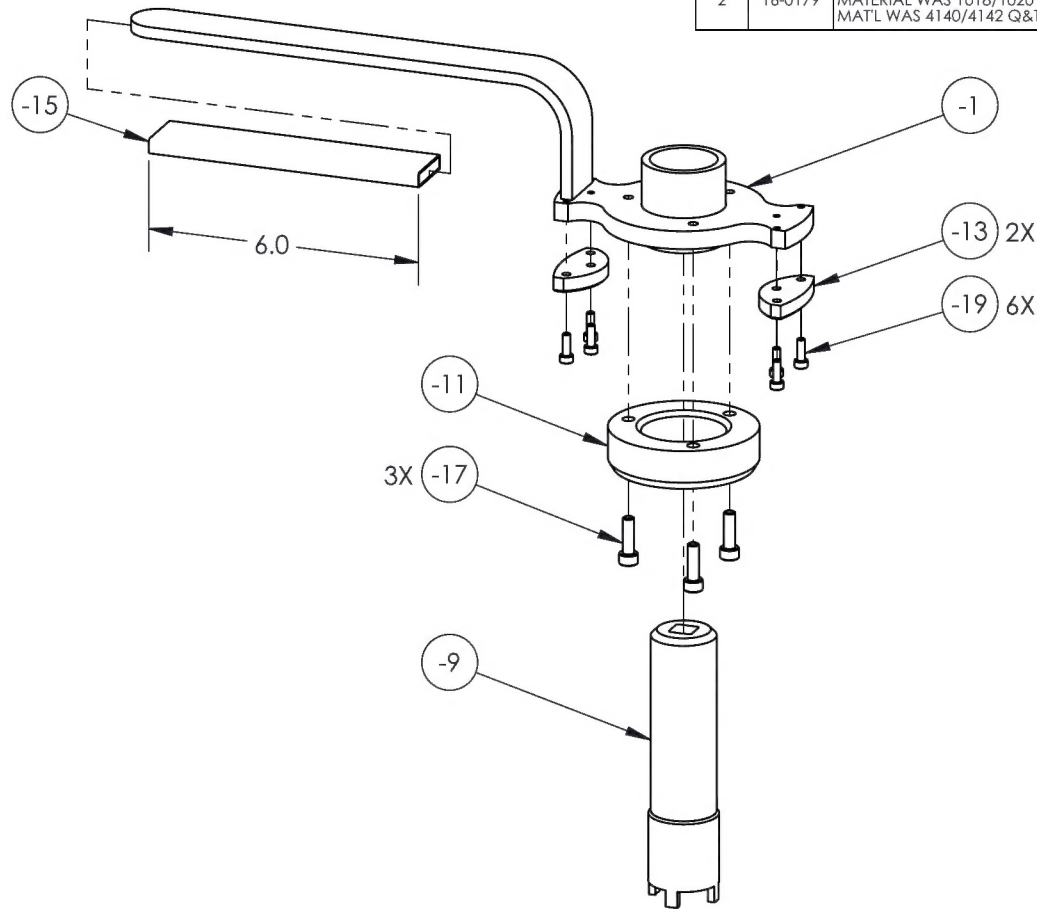

NOTES:




1. REF. AIRBUS T/N: M632V3004129.
2. PART OF KIT: RBEM632V3004103.

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
	X		-1	1	WRENCH WELDMENT			2
	1		-3		BASE PLATE	4140/4142		3
	1		-5		BASE TUBE	CDS		4
	1		-7		HANDLE	4140/4142		5
			-9	1	SOCKET	4140/4142		6
			-11	1	LARGE PAD	WHITE DELRIN/ACETAL		7
			-13	2	SMALL PAD	WHITE DELRIN/ACETAL		8
			-15	1	HEAT SHRINK	POLYOLEFIN	Ø1-1/2 I.D. BEFORE, Ø3/4 AFTER (MCMaster-CARR #7856K64) MODIFIED	1
		B/O	-17	3	SOCKET HEAD CAP SCREW	STEEL	M6 X 1mm X 20mm (MCMaster-CARR #90128A264)	1
		B/O	-19	6	SOCKET HEAD CAP SCREW	STEEL	M4 X 0.7mm X 12mm (MCMaster-CARR #90128A214)	1
	ASSY -1							

DART AEROSPACE	
TITLE NUT KEY	
DWG NO. RBEM632V3004129	REV 2
MAT'L	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± 5°
	.X ± .1 SURFACES = 125°
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
QA APPR: LINDSAY	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
APPROVED: GILBERT	USED ON MODEL
SCALE 1:4	H175
DATE 5/3/2016	SHEET 1 OF 8

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2	16-0179	•1 ADDED LASER ENGRAVE NOTE. ADDED DIM 6.7 NO ENGRAVE.	12/22/2016	DPD	JAG

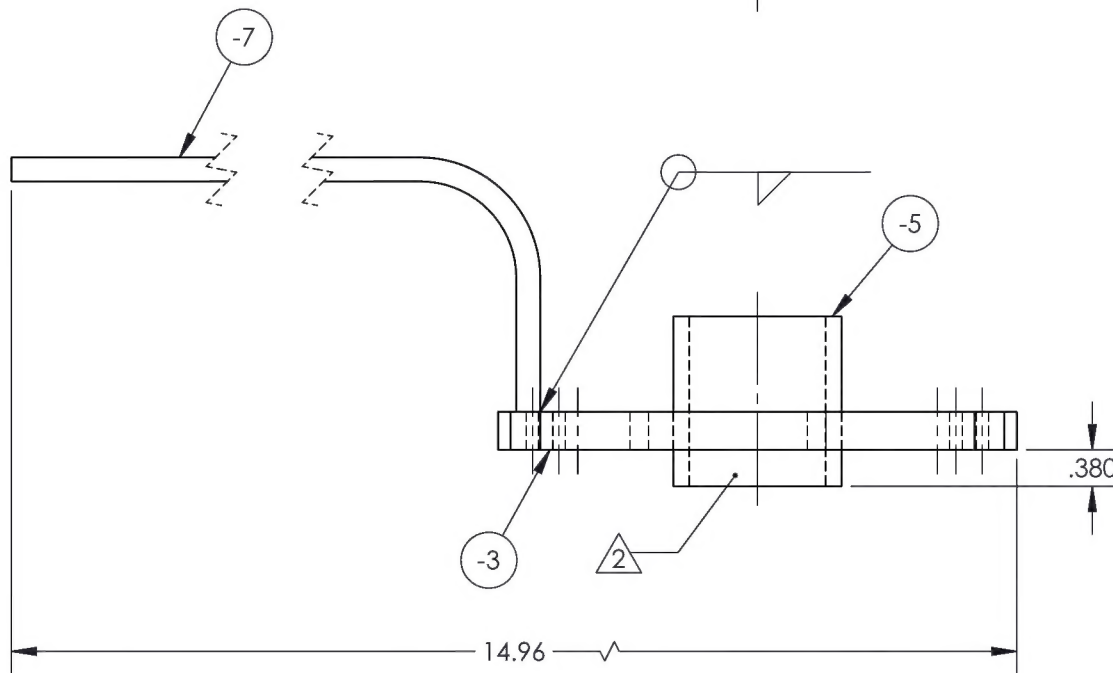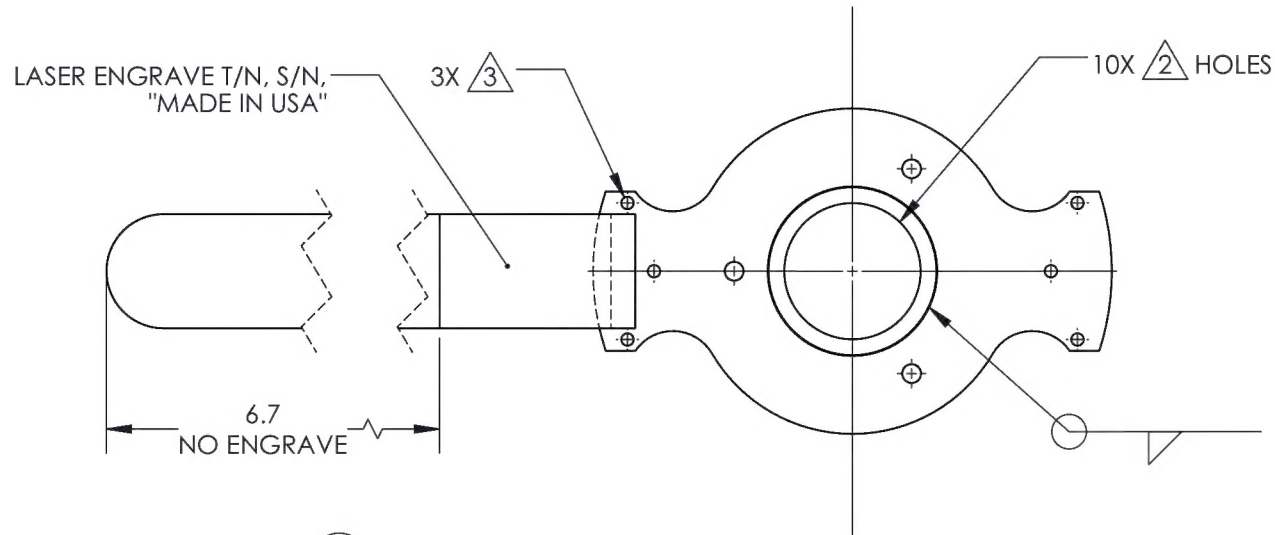

(-1)
WRENCH WELDMENT

NOTES:

- DUAL FINISH:
1ST: ZINC PLATE, ASTM B633 TYPE I SC2.
2ND: POWDER COAT YELLOW, FED #13538.



$\triangle 2$ NO POWDER COAT THIS SURFACE.

$\triangle 3$ NO WELD IN HOLES.


DART AEROSPACE	
TITLE NUT KEY	
DWG NO. RBEM632V3004129-1	REV 2
MAT'L HEAT TREAT FINISH SEE NOTE 1 SPEC	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX \pm .010 FRACTIONS \pm 1/8 .XX \pm .03 ANGLES \pm 1° .X \pm .1 SURFACES = 125✓	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY: DUERFELDT	USED ON MODEL H175
CHECKED: CLOUGH	
OPPS APPR: ANDERSON	
QA APPR: LINDSAY	
APPROVED: GILBERT	
SCALE 1:2	DATE 5/3/2016
SHEET 2 OF 8	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2	16-0179	-3 CH'D MATERIAL WAS 1018/1020 CR IS 4140/4142; ADDED HEAT TREAT.	10/20/2016	SM	JAG

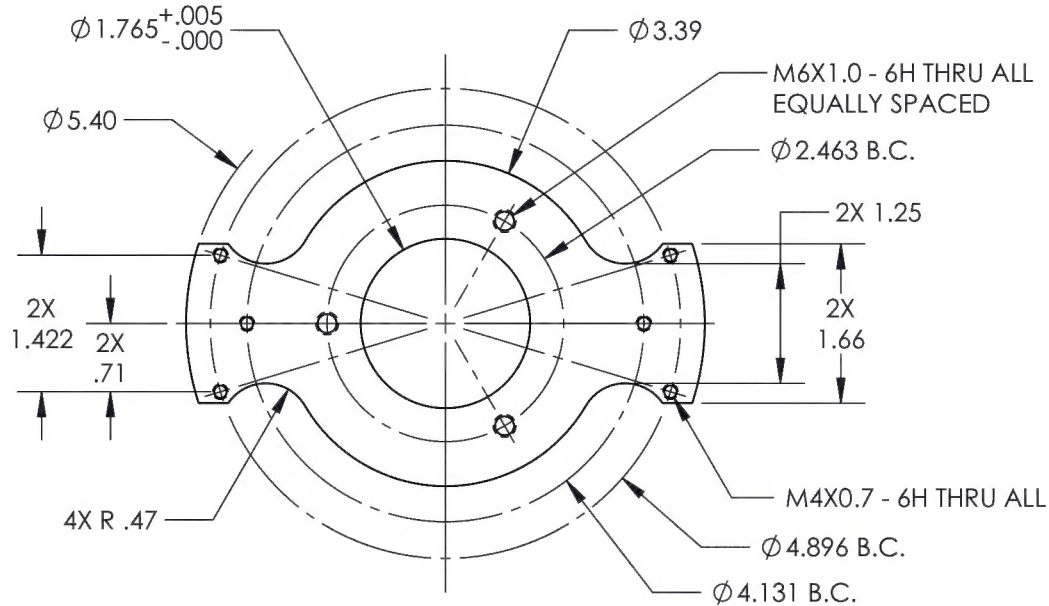




(-3)
BASE PLATE

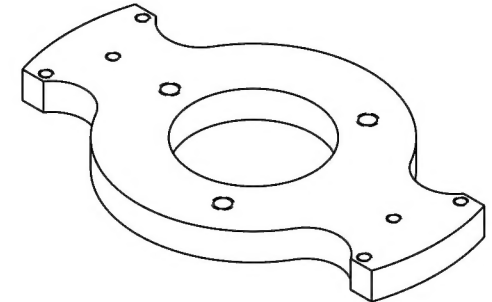

DART AEROSPACE	
TITLE NUT KEY	
DWG NO. RBEM632V3004129-3	REV 2
MAT'L 4140/4142 HEAT TREAT RC 28-34 FINISH SEE -1 SPEC	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX \pm .005 FRACTIONS \pm 1/8 .XX \pm .01 ANGLES \pm 5° .X \pm .1 SURFACES = 125° 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
DRAWN BY: DUERFELDT CHECKED: CLOUGH OPPS APPR: ANDERSON QA APPR: LINDSAY APPROVED: GILBERT	USED ON MODEL H175
SCALE 1:2	DATE 5/3/2016
SHEET 3 OF 8	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS							
REV	ECR	DESCRIPTION			DATE	INITIAL	APPROVED

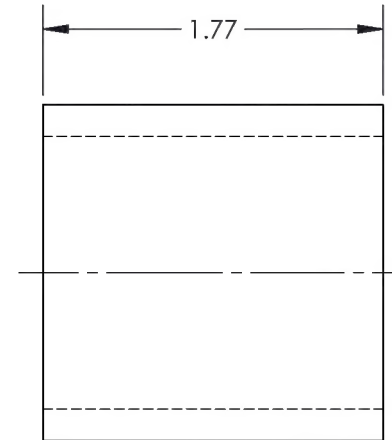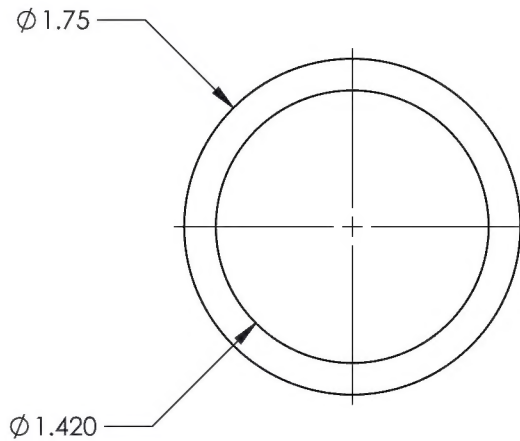



(5)
BASE TUBE

DART AEROSPACE	
TITLE NUT KEY	
DWG NO. RBEM632V3004129-5	REV 2
MAT'L CDS	UNLESS OTHERWISE SPECIFIED
HEAT TREAT	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .005 FRACTIONS ± 1/8
SPEC	.XX ± .01 ANGLES ± .5°
	.X ± .1 SURFACES = 125° ✓
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
SCALE 1:1	USED ON MODEL
DATE 5/3/2016	H175
	SHEET 4 OF 8

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2	16-0179	-7 CH'D MAT'L WS 1018/1020 CR IS 4140/4142; ADDED HEAT TREAT.	10/20/2016	SM	JAG

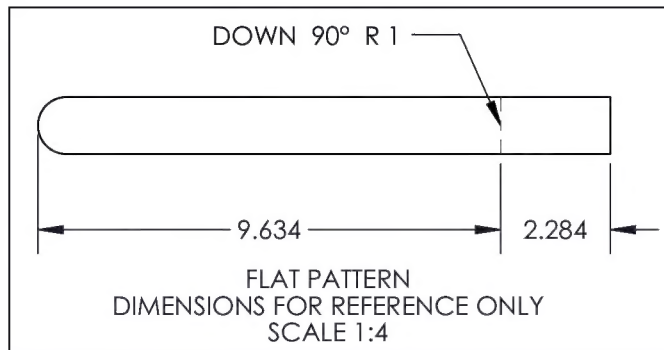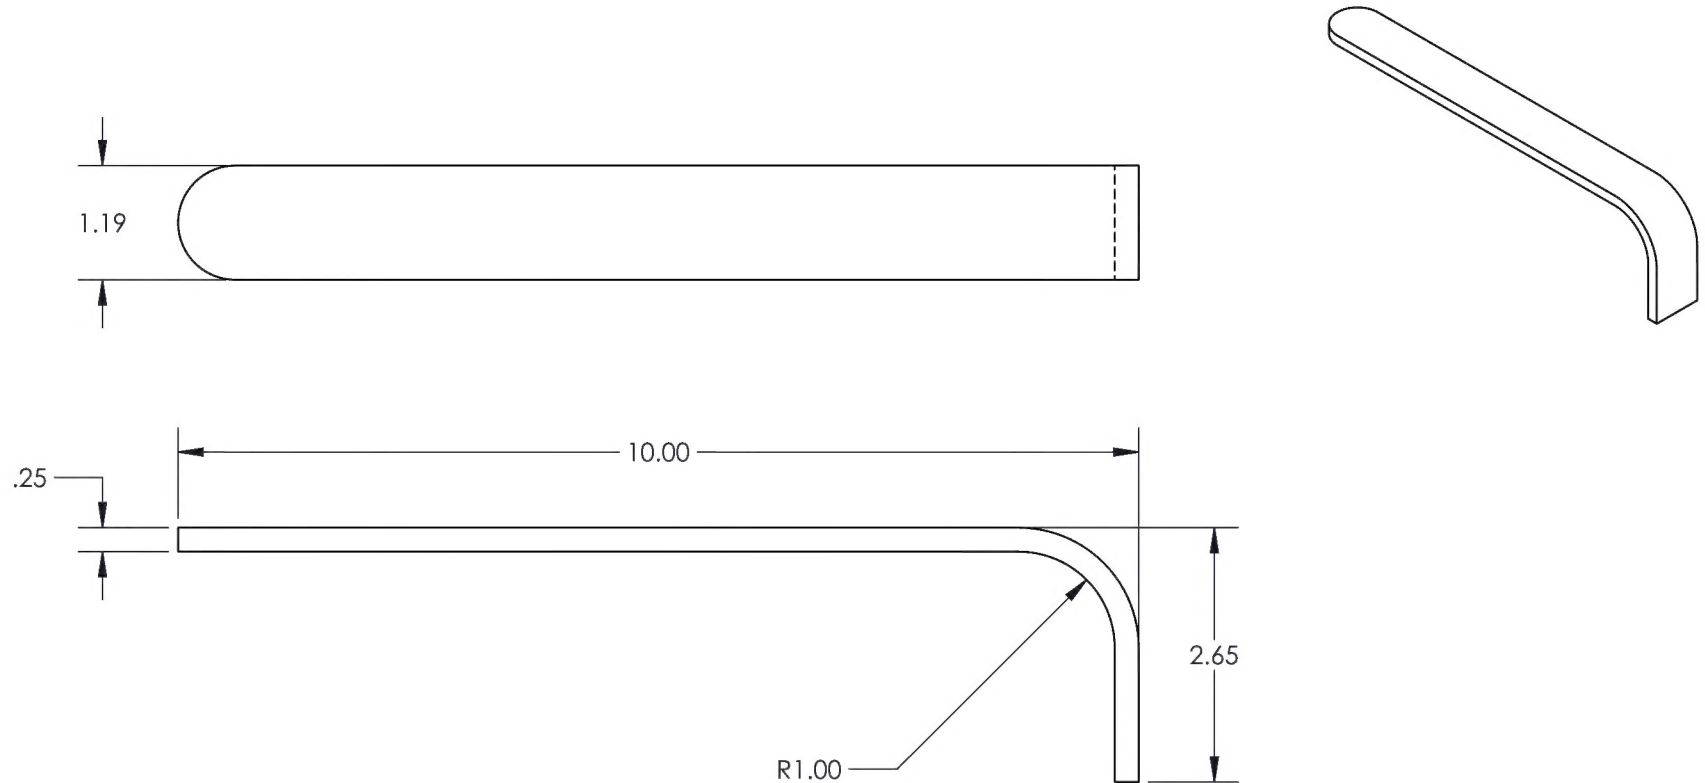


(-7)
HANDLE

DART AEROSPACE	
TITLE NUT KEY	
DWG NO. RBEM632V3004129-7	REV 2
MAT'L 4140/4142	UNLESS OTHERWISE SPECIFIED
HEAT TREAT RC 28-34	DIMENSIONS ARE IN INCHES
FINISH SEE -1	.XXX ± .010 FRACTIONS ± 1/8
SPEC	.XX ± .03 ANGLES ± 1°
	.X ± .1 SURFACES = 125° ✓
DRAWN BY: DUERFELDT	1. BREAK ALL SHARP EDGES
CHECKED: CLOUGH	.015 x 45° OR .015R
OPPS APPR: ANDERSON	2. DIMENSIONAL LIMITS APPLY
QA APPR: LINDSAY	AFTER PLATING
APPROVED: GILBERT	3. INTERPRET DIM AND TOL PER
	ASME Y14.5M-2009
	USED ON MODEL
	H175
SCALE 1:2	DATE 5/3/2016
	SHEET 5 OF 8

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2	16-0179	-9 CH'D DIM WAS 4.40 IS 5.27; CH'D MAT'L WAS 4140/4142 Q&T IS 4140/4142; ADDED HEAT TREAT.	10/20/2016	SM	JAG

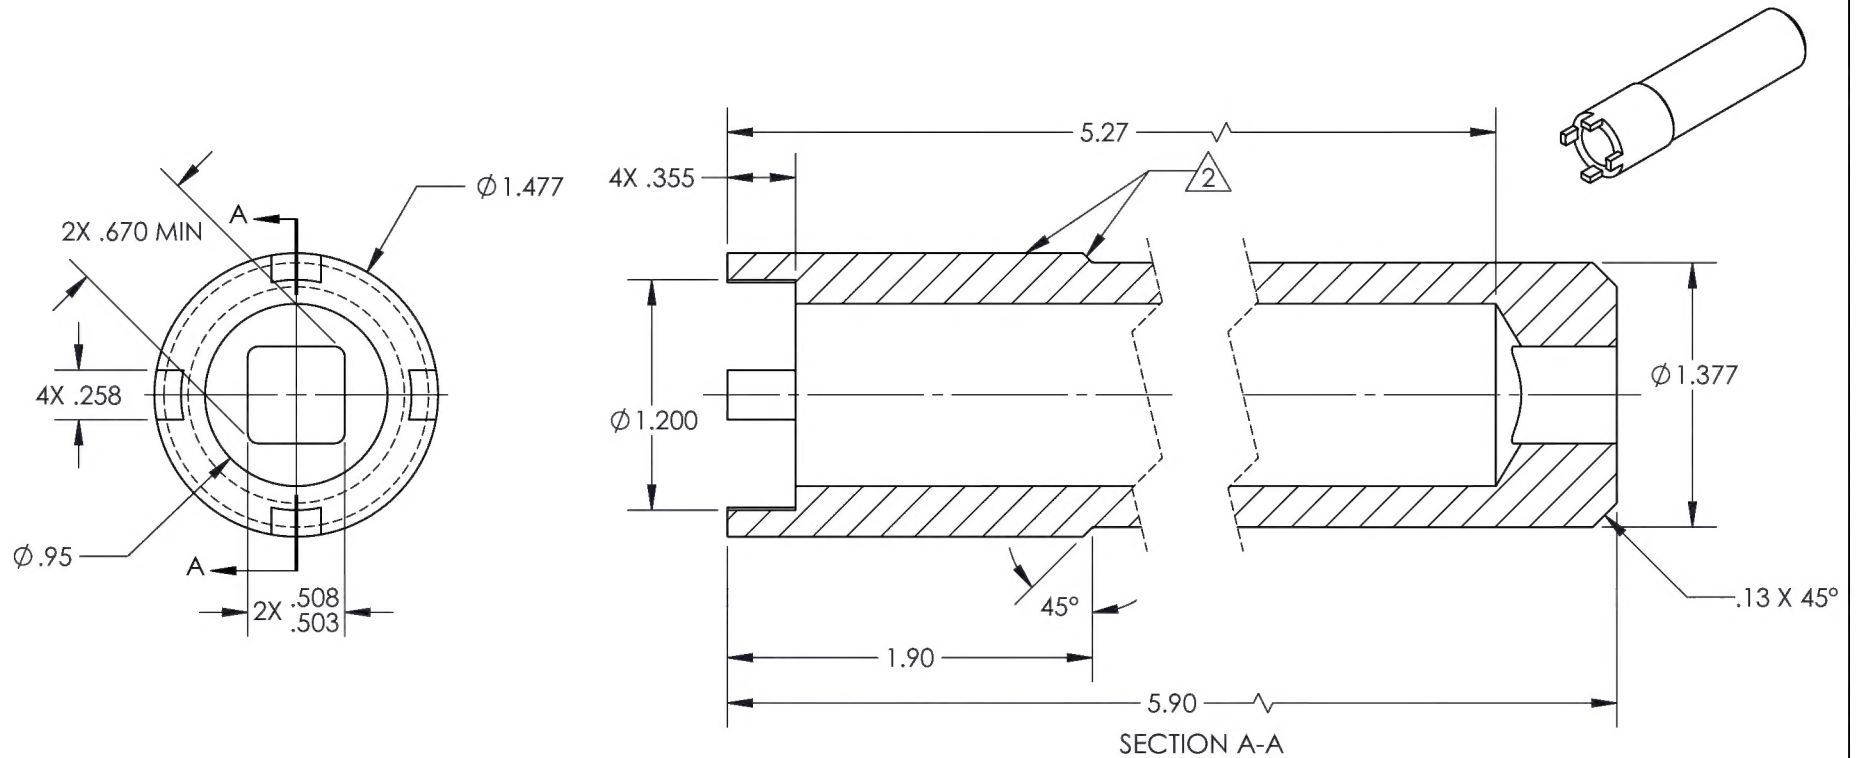

NOTES:

- DUAL FINISH:
1ST: ZINC PLATE, ASTM B633 TYPE I SC2.
2ND: POWDER COAT YELLOW, FED #13538.

2 POWDER COAT THIS SURFACE ONLY.






TITLE		NUT KEY	
DWG NO.		RBEM632V3004129-9	
REV		2	
MAT'L 4140/4142		UNLESS OTHERWISE SPECIFIED	
HEAT TREAT RC 28-34		DIMENSIONS ARE IN INCHES	
FINISH SEE NOTE 1		.XXX ± .005 FRACTIONS ± 1/8	
SPEC		.XX ± .01 ANGLES ± 5°	
DRAWN BY: DUERFELDT		.X ± .1 SURFACES = 125	
CHECKED: CLOUGH		1. BREAK ALL SHARP EDGES	
OPPS APPR: ANDERSON		.015 x 45° OR .015R	
QA APPR: LINDSAY		2. DIMENSIONAL LIMITS APPLY	
APPROVED: GILBERT		AFTER PLATING	
SCALE		3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
1:1		USED ON MODEL	
DATE		H175	
5/3/2016		SHEET 6 OF 8	

(-9)

SOCKET

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

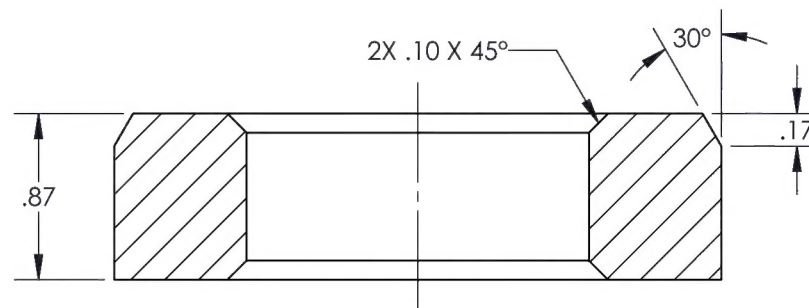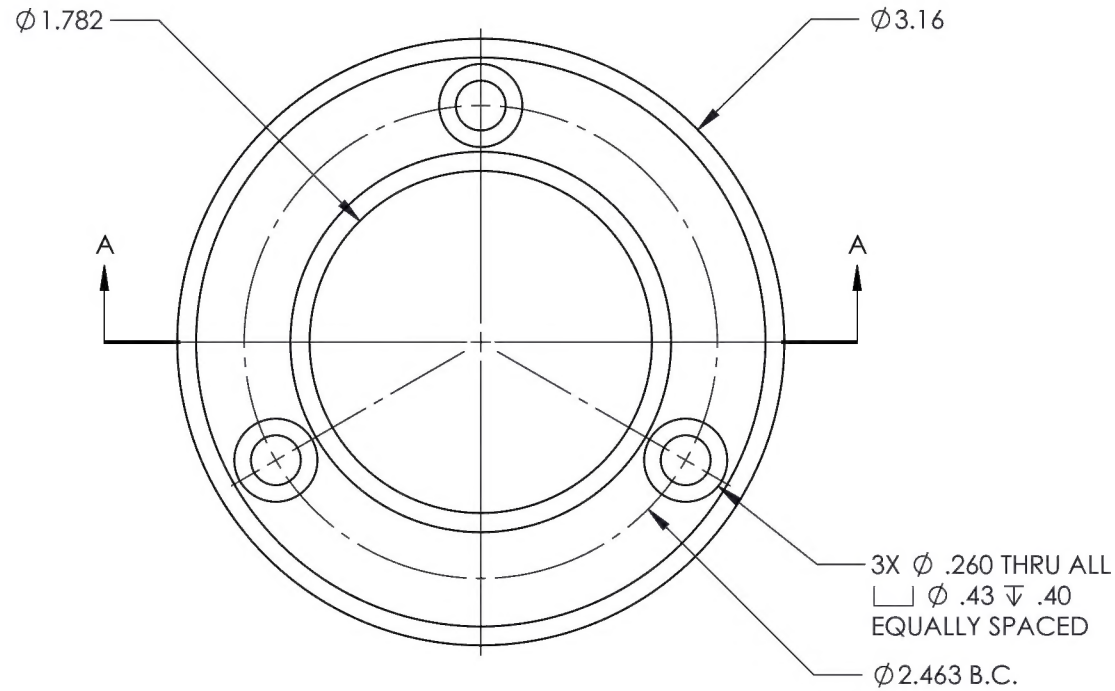

SECTION A-A




(11)

LARGE PAD

DART AEROSPACE	
TITLE NUT KEY	
DWG NO. RBEM632V3004129-11	REV 2
MAT'L WHITE DELRIN/ACETAL TREAT FINISH SPEC	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX \pm .005 FRACTIONS \pm 1/8 .XX \pm .01 ANGLES \pm .5° .X \pm .1 SURFACES = 125° ✓	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY: DUERFELDT	USED ON MODEL
CHECKED: CLOUGH	H175
OPPS APPR: ANDERSON	
QA APPR: LINDSAY	
APPROVED: GILBERT	
SCALE 1:1	DATE 5/3/2016
SHEET 7 OF 8	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

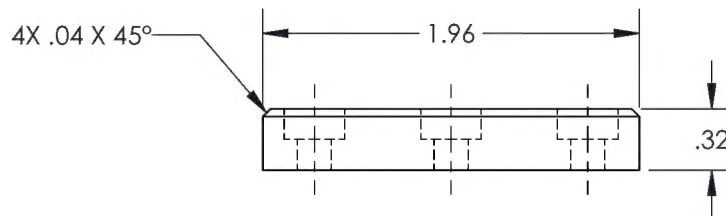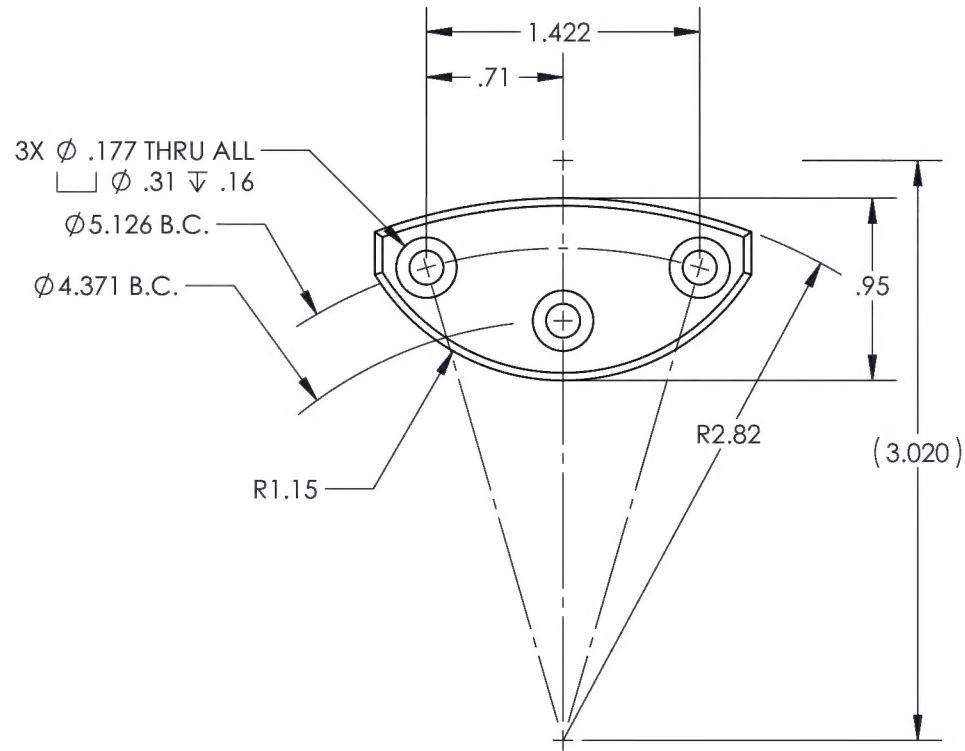

(13)

SMALL PAD

DART AEROSPACE	
TITLE NUT KEY	
DWG NO. RBEM632V3004129-13	REV 2
MAT'L WHITE DELRIN/ACETAL TREAT FINISH SPEC	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± .5° .X ± .1 SURFACES = 125°	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
DRAWN BY: DUERFELDT	USED ON MODEL H175
CHECKED: CLOUGH	
OPPS APPR: ANDERSON	
QA APPR: LINDSAY	
APPROVED: GILBERT	
SCALE 1:1	DATE 5/3/2016
SHEET 8 OF 8	